


MM-031-10

Cable Lugs for PinBrazing

To be crimped to the cable

SAFETRACK's cable lugs are specially made for PinBrazing.

Use SAFETRACK's crimping tools to ensure adequate contact.

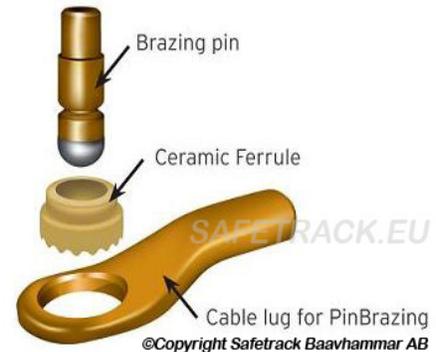


SAFE no.	Cable size	ø d / D(mm)	Qty/pack	Rec. Brazing pin(incl. in CP)
SAFE 6056(CP)	10 mm ² (#7-8)	6/9	100	SAFE 10051/10011
SAFE 6057(CP)	Ø6/16mm ² (#5)	6,5/9	100	SAFE 10051/10011
SAFE 6078(CP)	20 mm ² (#4)	7/10	100	SAFE 10051/10011
SAFE 6080(CP)	25 mm ² (#3-4)	8/12	100	SAFE 10301/10101
SAFE 6091(CP)	Ø8mm	8,5/12	100	SAFE 10301/10101
SAFE 6081(CP)	35 mm ² (#2)	9/12	100	SAFE 10301/10101
SAFE 6079(CP)	50 mm ² (#1/0)	11/14	100	SAFE 10301/10101
SAFE 60847(CP)	70 mm ² (#2/0)	13/17	100	SAFE 10191/10131
SAFE 60683(CP)	110-120 mm ² (#4/0)	16/20	25	2x SAFE 10191/10131



For connecting smaller cable sizes use terminal sleeves and lugs as follow:

2,5 mm² (#13 AWG), use terminal sleeve SAFE 6700 + lug SAFE 6056 (10 mm² cable lug)
 4,0 mm² (#11 AWG), use terminal sleeve SAFE 6701 + lug SAFE 6056
 6,0 mm² (#9-10 AWG), use terminal sleeve SAFE 6702 + lug SAFE 6056

To be PinBrazed to the cable

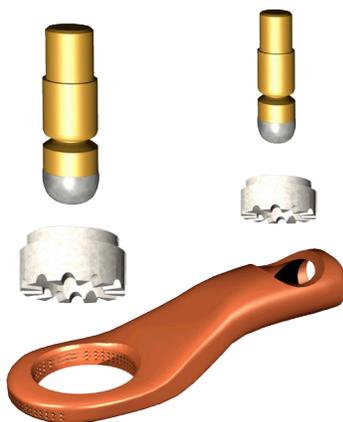

This cable lug is both PinBrazed to the cable and to the surface. No crimping tool is needed. The cable is inserted in the lug which is flatten and the cable is then PinBrazed to the lug by placing the brazing pin in the flattened hole.

SAFE no.	Cable size	Qty/pack	Rec. Brazing pin
SAFE 6062	25 mm ² / ø8 mm	50	2x SAFE 10301/10101
SAFE 6063	35 mm ² / ø9 mm	50	2x SAFE 10301/10101
SAFE 6064	50 mm ² / ø11 mm	50	2x SAFE 10301/10101
SAFE 6066	AWG #3-#6	50	2x SAFE 10301/10101
SAFE 6060	AWG #3-#6 shaped for 5/8" rod	50	2x SAFE 10301/10101